

Features

- Auto Dialer
 - Quick Name Search: up to 280 stations (up to 1000 stations with optional SD memory card)
 - One-touch: up to 80 stations
 - Abbreviated: up to 200 stations
 - Digit of Telephone number (up to 36 digits)
- Auto Dial Prefix Insertion
- Program Keys (up to 80 programs)
- Multi-Tasking Operation
- Directory Search Dialing
- Directory Sheet Print
- Intelligent Redial
- Chain Dialing
- Quick Memory Transmission
- Multi-station Transmission (up to 330 stations)
- Deferred Transmission
- Deferred Multi-station Transmission
- Duplex Transmission
- Receive to Memory
- Substitute Reception
- Number of memory job files (Max. 50 files)
- Fax Forward
- Polling /Multi-station Polling
- Deferred Polling / Deferred Multi-station Polling
- Memory Polling Transmission (1 file)
- ITU-T Sub-address Transmission
- 256-Level Halftone

- Automatic/Fixed Reduction
- Collation Stack
- Verification Stamp
- Communication Journal with image data
- Header/Total Page Print
- Transmission Journal with view mode
- Fax Access Code (Fax Lock)
- PIN Code Access
- Multiple Copy with Sorting (up to 99)
- Duplex Copy
- Zoom/Reduction Copy
- Sort Copy
- Bypass Copy
- Energy Saver
- Remote Diagnostic
- Check & Call Function
- LAN PC Fax software (Panafax® Desktop)
- Document Manager
- Document Viewer with Annotation
- Network Address Book Editor
- Network Configuration Editor
- Network Status Monitor
- Dynamic Host Confirmation Protocol (DHCP) client ready
- Lightweight Directory Access Protocol (LDAP) compatible
- Simple Mail Transfer Protocol (SMTP) Authentication

Options


Memory

SD Memory Card (Maximum 512MB)

*Contact your local dealer



Handset Kit
UE-403171



Stand
DA1D190



**550-sheet
2nd Paper Feed Module**
DA-DS188

Accounting Software DA-WA10

*Requires additional SD memory

Expansion Board DA-EM600F

Printer Controller Module
UE-404091

**Internet Fax/Email/
Network Scanner Module**
UE-404090

**G3 Communication
Port Kit (2nd G3 Fax)**
UE-407026

Consumables



Toner cartridge
UG-5530

UF-8000 Specifications

General Specifications

| | |
|--------------------------|---|
| Type | Desktop |
| Power Requirement | AC 120V, 50/60 Hz |
| Power Consumption | Max: Approximately 1000 W Power saver mode: 12 W Sleep mode: 7 W |
| Dimensions (W x D x H)*1 | 17.7" x 16.5" x 17.6" (450 x 418 x 448 mm) (Excluding optional equipment) |
| Weight*1 | Approx. 48.5 lb (Approx. 22 kg) (Excluding optional equipment) |

Fax Specifications

| | |
|----------------------------|---|
| Compatibility | ITU-T Group 3, ECM |
| Modem Speed | 33.6 kbps - 2.4 kbps with automatic fallback |
| Coding Scheme | MH/MR/MMR/JBIG |
| Transmission Speed*2 | Approximately 2.7 seconds / page (Letter) |
| Number of Memory Job Files | 50 |
| Document Size | Max: 8.5" x 78.7" (216 mm x 2000 mm ³) with operator's assistance Min: 5.5" x 5.5" (140 mm x 140 mm) |
| Effective Scanning Width | 8.34" (212mm) |
| Automatic Document Feeder | 100 pages (20 lb, 75 g/m ³) |
| Scanning Speed*4 | Approximately 0.7 seconds/page (Letter, 203 dpi x 98 lpi) |
| Scanning Resolution | Standard: 203 dots/inch x 98 lines/inch (8 dots/mm x 3.85 lines/mm) Fine: 203 dots/inch x 196 lines/inch (8 dots/mm x 7.7 lines/mm) Super Fine: 406 dots/inch x 391 lines/inch (16 dots/mm x 15.4 lines/mm) 600 dpi: 600 dots/inch x 600 dots/inch |
| Recording Method | Monochrome laser printing on plain paper |
| Recording Paper Size | Letter/Legal |
| Effective Recording Width | 8.15" (207mm) |
| Paper Feed | Standard Tray: 250 sheets paper tray unit x 1 + 1-sheet bypass Maximum 800 sheets with option |
| Image Memory Capacity*5 | Standard: 12MB (720 pages) Maximum: 512MB (12,750 pages) |
| Number of Auto Dialers | Standard: 280 Max: 1,000 with optional SD Memory Card (32MB to 512MB) |

Printer Specifications

| | |
|-----------------------------|---|
| Network Printer Interface | Ethernet 10Base-T/100Base-TX |
| Local Printer Interface | USB 1.1 |
| Printing Speed*6 | Up to 19 ppm |
| Paper Size | Letter/Legal/Invoice ⁷ /Envelope (#9, #10) ⁷ |
| Printing Resolution | 1200 dpi equivalent ⁸ x 600 dpi |
| Printer Memory | 32MB |
| Printer Language | Standard: Panasonic Printing System for Windows® (GDI) Option: PCL 5e Emulation, PCL 6 Emulation |
| Compatible Operating System | Windows® XP/2000/Server 2003/98/Me, Windows NT® 4.0 |

Network Scanner Specifications

| | |
|---------------------------|---|
| Network Scanner Interface | Ethernet 10Base-T/100Base-TX |
| Scanning Resolution | 600 x 600 dpi, 300 x 300 dpi, 150 x 150 dpi |
| Scanning Speed*4 | Approximately 1.1 seconds (Letter, 150 x 150 dpi) |
| Data Format | TIFF, PDF |

Scan-to-Email / Internet Fax Specifications


| | |
|------------------------|--|
| Compatibility | IETF RFC 2305, ITU-T T.37 |
| Communication Protocol | TCP/IP, SMTP, POP3, MIME, DHCP LDAP, SNMP/MIB |
| Network Connectivity | Ethernet 10Base-T/100Base-TX (IEEE802.3) |
| Data Format*9 | TIFF-FX (Profile S/F/J), PDF |

Notes

- *1 Dimensions and weight are approximate.
- *2 Transmission time applies to memory transmission of text data using only ITU-T Image No.1 between the same models at maximum modem speed. Transmission time may vary in actual usage. Usually public telephone lines can only support communication speeds of 28.8 Kbps or lower. Via PBX, transmission speed may fall back to a lower speed.
- *3 Standard/Fine mode
- *4 Scanning speed applies to the feeding process from the top to the end of a single page test chart. The time for the feeding process does not include the time that it takes for the top edge of the page to reach the scanning point and page ejection. Time for entire storing process is not applied.
- *5 Based on ITU-T Image No.1 scanned in Standard mode.
- *6 Speeds are contingent upon applications, machine configuration, and status. Individual speeds may vary.
- *7 Bypass only
- *8 With optional Printer Controller Module
- *9 Internet Fax only supports TIFF-FX format.

Design and specifications are subject to change without notice. Not all options may be available at the time of notification.

Microsoft® Windows® and Windows NT® are registered trademarks of Microsoft Corporation.
PCL is a registered trademark of Hewlett-Packard Company and/or its subsidiaries.
All other brand or product names are the property of their respective holders.

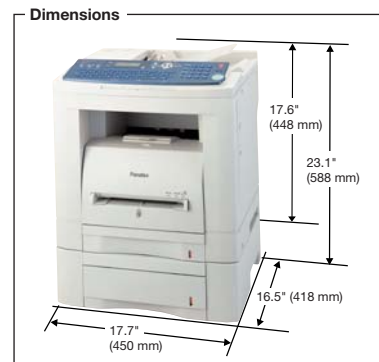

Panasonic®

Panasonic Digital Document Company
Unit of Matsushita Electric Corporation of America
Two Panasonic Way, Secaucus, NJ 07094
For a local dealer, please call 1-800-742-8086
panasonic.com/panafax



As an Energy Star® partner, Panasonic has determined that this product meets the Energy Star® guidelines for energy efficiency.

ISO 9001 Quality Management System

Our business processes which produce document, information and network products, from manufacturing to marketing, conform to ISO9001 Quality Management Systems standard. Design, development, manufacture, installation, repair and maintenance of document, information and network products, their associated devices and consumables in addition, the plants outside Japan have acquired ISO 9001 certification.



001

FAX-UF8000-BR